



## INTRODUCTION


YY-1100 series is pitch 2.0mm and available in 2- to 16-circuit.

This series is wire to board connector including receptacle housings, female terminals and semi-shrouded header.

It provides a reliable connection interface. This system is thin, low-profile and compact.

- The dimple at the center of the contact ensures positive contact and low contact resistance.
- A friction lock applies good mating retention.
- Polarizing features ensure mating in a proper orientation.
- Box style terminal protects contact area.
- It accepts AWG #26~ #30 wire range.
- Semi-shrouded header

## *Connector Systems Table of Contents 2.00mm (.079") Pitch / Disconnectable Crimp Style Connectors*

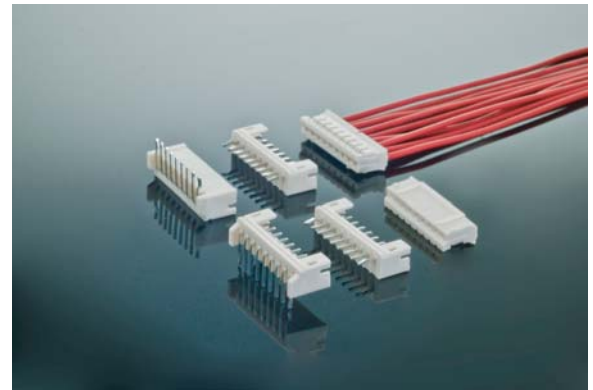

## SPECIFICATION

- Rated current : 2A Max.
- Rated voltage : 100 V AC ,DC
- Contact resistance : 20 mΩ Max.
- Insulation resistance : 1,000 MΩ Min.
- Dielectric withstand voltage : 800V AC / minute
- Temperature range : -25 °C / +85 °C
- Packaging : Header - Bag  
Housing - Bag  
Terminals - Reel

## CONSUMER

- Automotive Vehicles
- Compact Devices
- Video / DVD products
- Automatic vending machines
- Fax machines
- Printers
- Televisions