



INTRODUCTION


YY-1150 series is pitch 2.5mm pitch, single row and available in 2- to 8- circuit.

This series is wire to board connectors, including receptacle housing, female terminal and straight/ right angle header.

It's very thin 2.5mm pitch connector. It's designed to meet the demand of the high-density connection of internal wires to printed circuit boards.

- It's compact and slim
- Housing is equipped with two latching ramps to held securely to the header
- Box style terminal protects contact area
- It accepts AWG #22 - #28 wire range
- TSemi-shrouded header

Connector Systems Table of Contents 2.50 mm(.098") Pitch Wire To Board Connectors

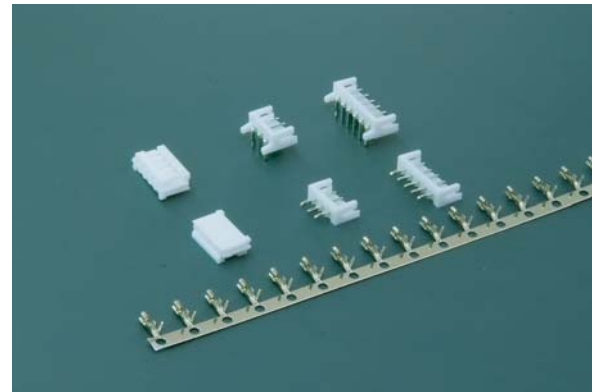

SPECIFICATION

- Rated current : 3A Max.
- Rated voltage : 250 V AC
- Contact resistance : 20 mΩ Max.
- Insulation resistance : 1, 000 MΩ Min.
- Dielectric withstand voltage : 800V AC / minute
- Temperature range : -25 °C / +85 °C
- Packaging : Header - Bag
Housing - Bag
Terminals - Reel

CONSUMER

- Automotive Vehiaile
- Compact Device
- Video / DVD products
- Automatic vending machine
- Fax machines
- Printers
- Televisions