



## INTRODUCTION


YY-1550 series is pitch 2.5mm and available in 2- to 15-circuit.

It's wire to board connector including housing, terminal and header. The terminal is like a "spring box".

This design style provides multiple points of contact and protects the mating interface area.

- Box style terminal is with multiple contact points and well protection.
- Friction locks secure mating retention.
- Accept AWG #24~ #28 wire range.
- Header is with 0.7mm round pin.

## *Connector Systems Table of Contents 2.50 mm(.197") Pitch Wire To Board Header Connectors*

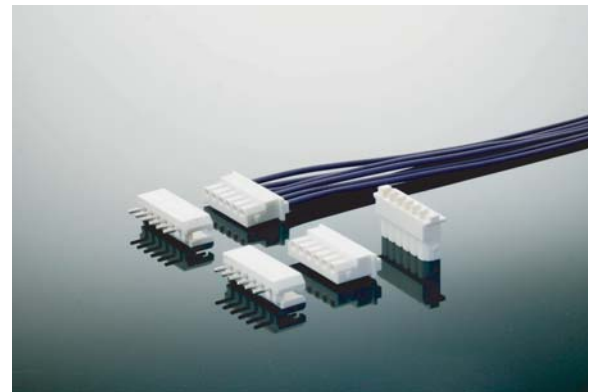

## SPECIFICATION

- Rated current : 3A Max.
- Rated voltage : 250 V AC
- Contact resistance : 20 mΩ Max.
- Insulation resistance : 1,000 MΩ Min.
- Dielectric withstand voltage : 1,000 V AC
- Temperature range : -25 °C / +85 °C
- Packaging : Header - Bag  
Housing - Bag  
Terminals - Reel

## CONSUMER

- Automotive Vehicles
- Business machines
- Data Commerce / Copiers
- Automatic vending machines
- Lab equipments
- Networking / Routers
- Telecommunication systems