



REV	DESCRIPTION	DATE

NOTES

Available in 02 through 15 Circuits
 Material: Nylon 66 UL94-V0
 Color: Nature
 Packing: Bag

SPECIFICATION

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC(Max.) AWG#22
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: 800V AC/minute
 Temperature Range: -25°C to +85°C




ORDERING INFORMATION

YY-1101 - H **


1

1. No. of Circuits 02~15




Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2	2.0	6.0	9	16.0	20.0
3	4.0	8.0	10	18.0	22.0
4	6.0	10.0	11	20.0	24.0
5	8.0	12.0	12	22.0	26.0
6	10.0	14.0	13	24.0	28.0
7	12.0	16.0	14	26.0	30.0
8	14.0	18.0	15	28.0	32.0

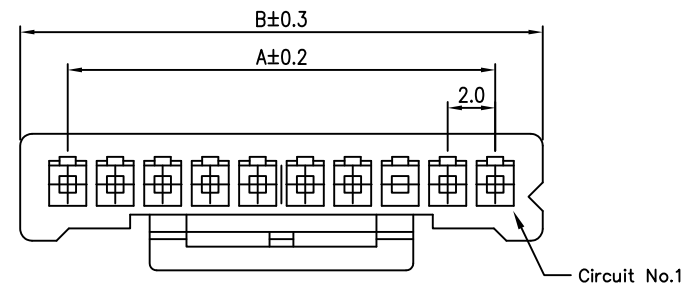


2-4 Circuits

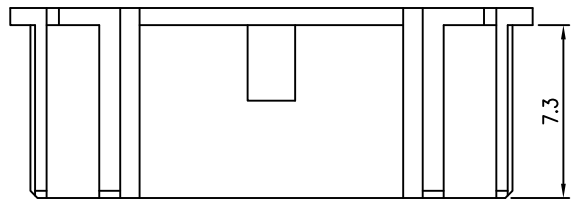

10-15 Circuits

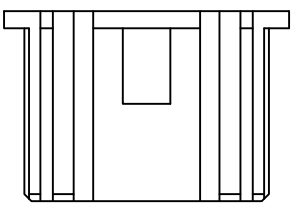

5-9 Circuits

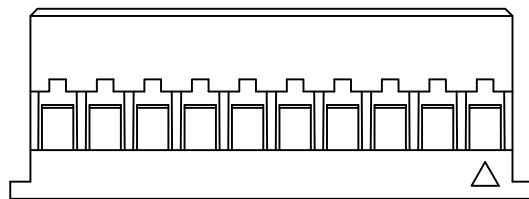

TOLERANCE	
X.	--
X.X	±0.25
X.XX	±0.20
X.XXX	--
ANGULAR	--





TITLE
 2.0mm(.079") Pitch
 Wire to Board Housing

APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	Frank		F	YY-1101-H**	A0
CHECKED	Denise				
APPROVED	Jessica	UNIT	SIZE	DWG NO.	SHEET
		MM	A4	YY-1101-H**-043	1 OF 1





REV	DESCRIPTION	DATE
A1	EN000211-2	2011.02.11

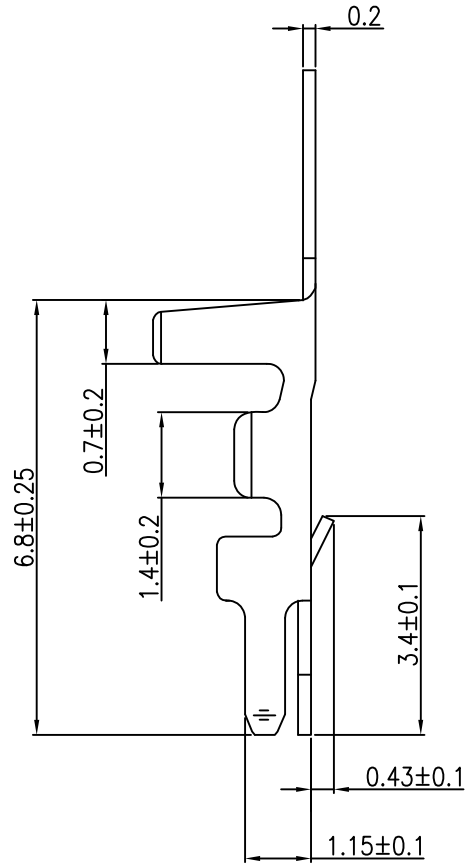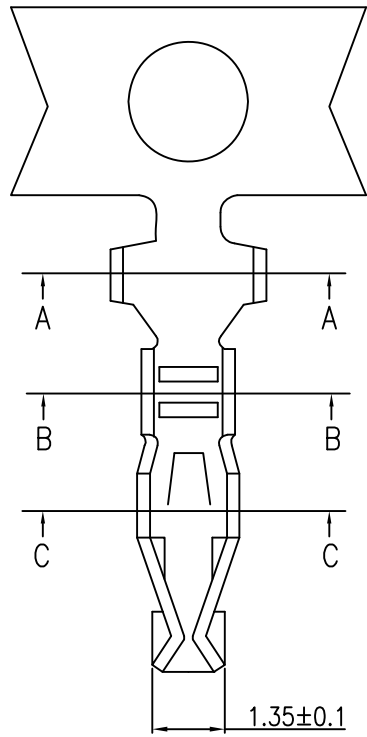


NOTES

Used in YY-1101-H Series Housing
 Accepts AWG #22~28 Wire Range
 Material : Phosphor Bronze
 Finish : Tin-Plated
 Qty/Reel : 10,000 PCS
 Thickness: 0.2mm


ORDERING INFORMATION

YY-1101 - T TB P
 1 2 3


1. T : Terminal
2. TB : Tin Plated
3. Material
P : Phosphor Bronze



A-A



B-B



C-C

TOLERANCE	
X.	--
X.X	±0.25
X.XX	±0.15
X.XXX	--
ANGULAR	--



TITLE
2.0mm(.079") Pitch
Wire to Board Terminal

APPROVALS		VIEW	SCALE	PART NO.	REV.
DRAWN	Frank		F	YY-1101-TTBP	A1
CHECKED	Denise				
APPROVED	Jessica	UNIT	SIZE	DWG NO.	SHEET
		MM	A4	YY-1101-TTBP-043	1 OF 1





REV	DESCRIPTION	DATE

NOTES

Available in 02 through 15 Circuits
 Material: Glass-filled PBT UL94-V0
 Pin Material: Brass/Tin-Plated or Gold-Plated
 Color: Nature
 Packing: Bag

SPECIFICATION


Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC(Max.) AWG#22
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: 800V AC/minute
 Temperature Range: -25°C to +85°C

ORDERING INFORMATION

YY-1101 - W ** R *
 1 2 3

- No. of Circuits 02~15
- R : Right Angle
- Plated
 T : Tin-Plated
 G : Gold-Plated

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2	2.0	6.0	9	16.0	20.0
3	4.0	8.0	10	18.0	22.0
4	6.0	10.0	11	20.0	24.0
5	8.0	12.0	12	22.0	26.0
6	10.0	14.0	13	24.0	28.0
7	12.0	16.0	14	26.0	30.0
8	14.0	18.0	15	28.0	32.0

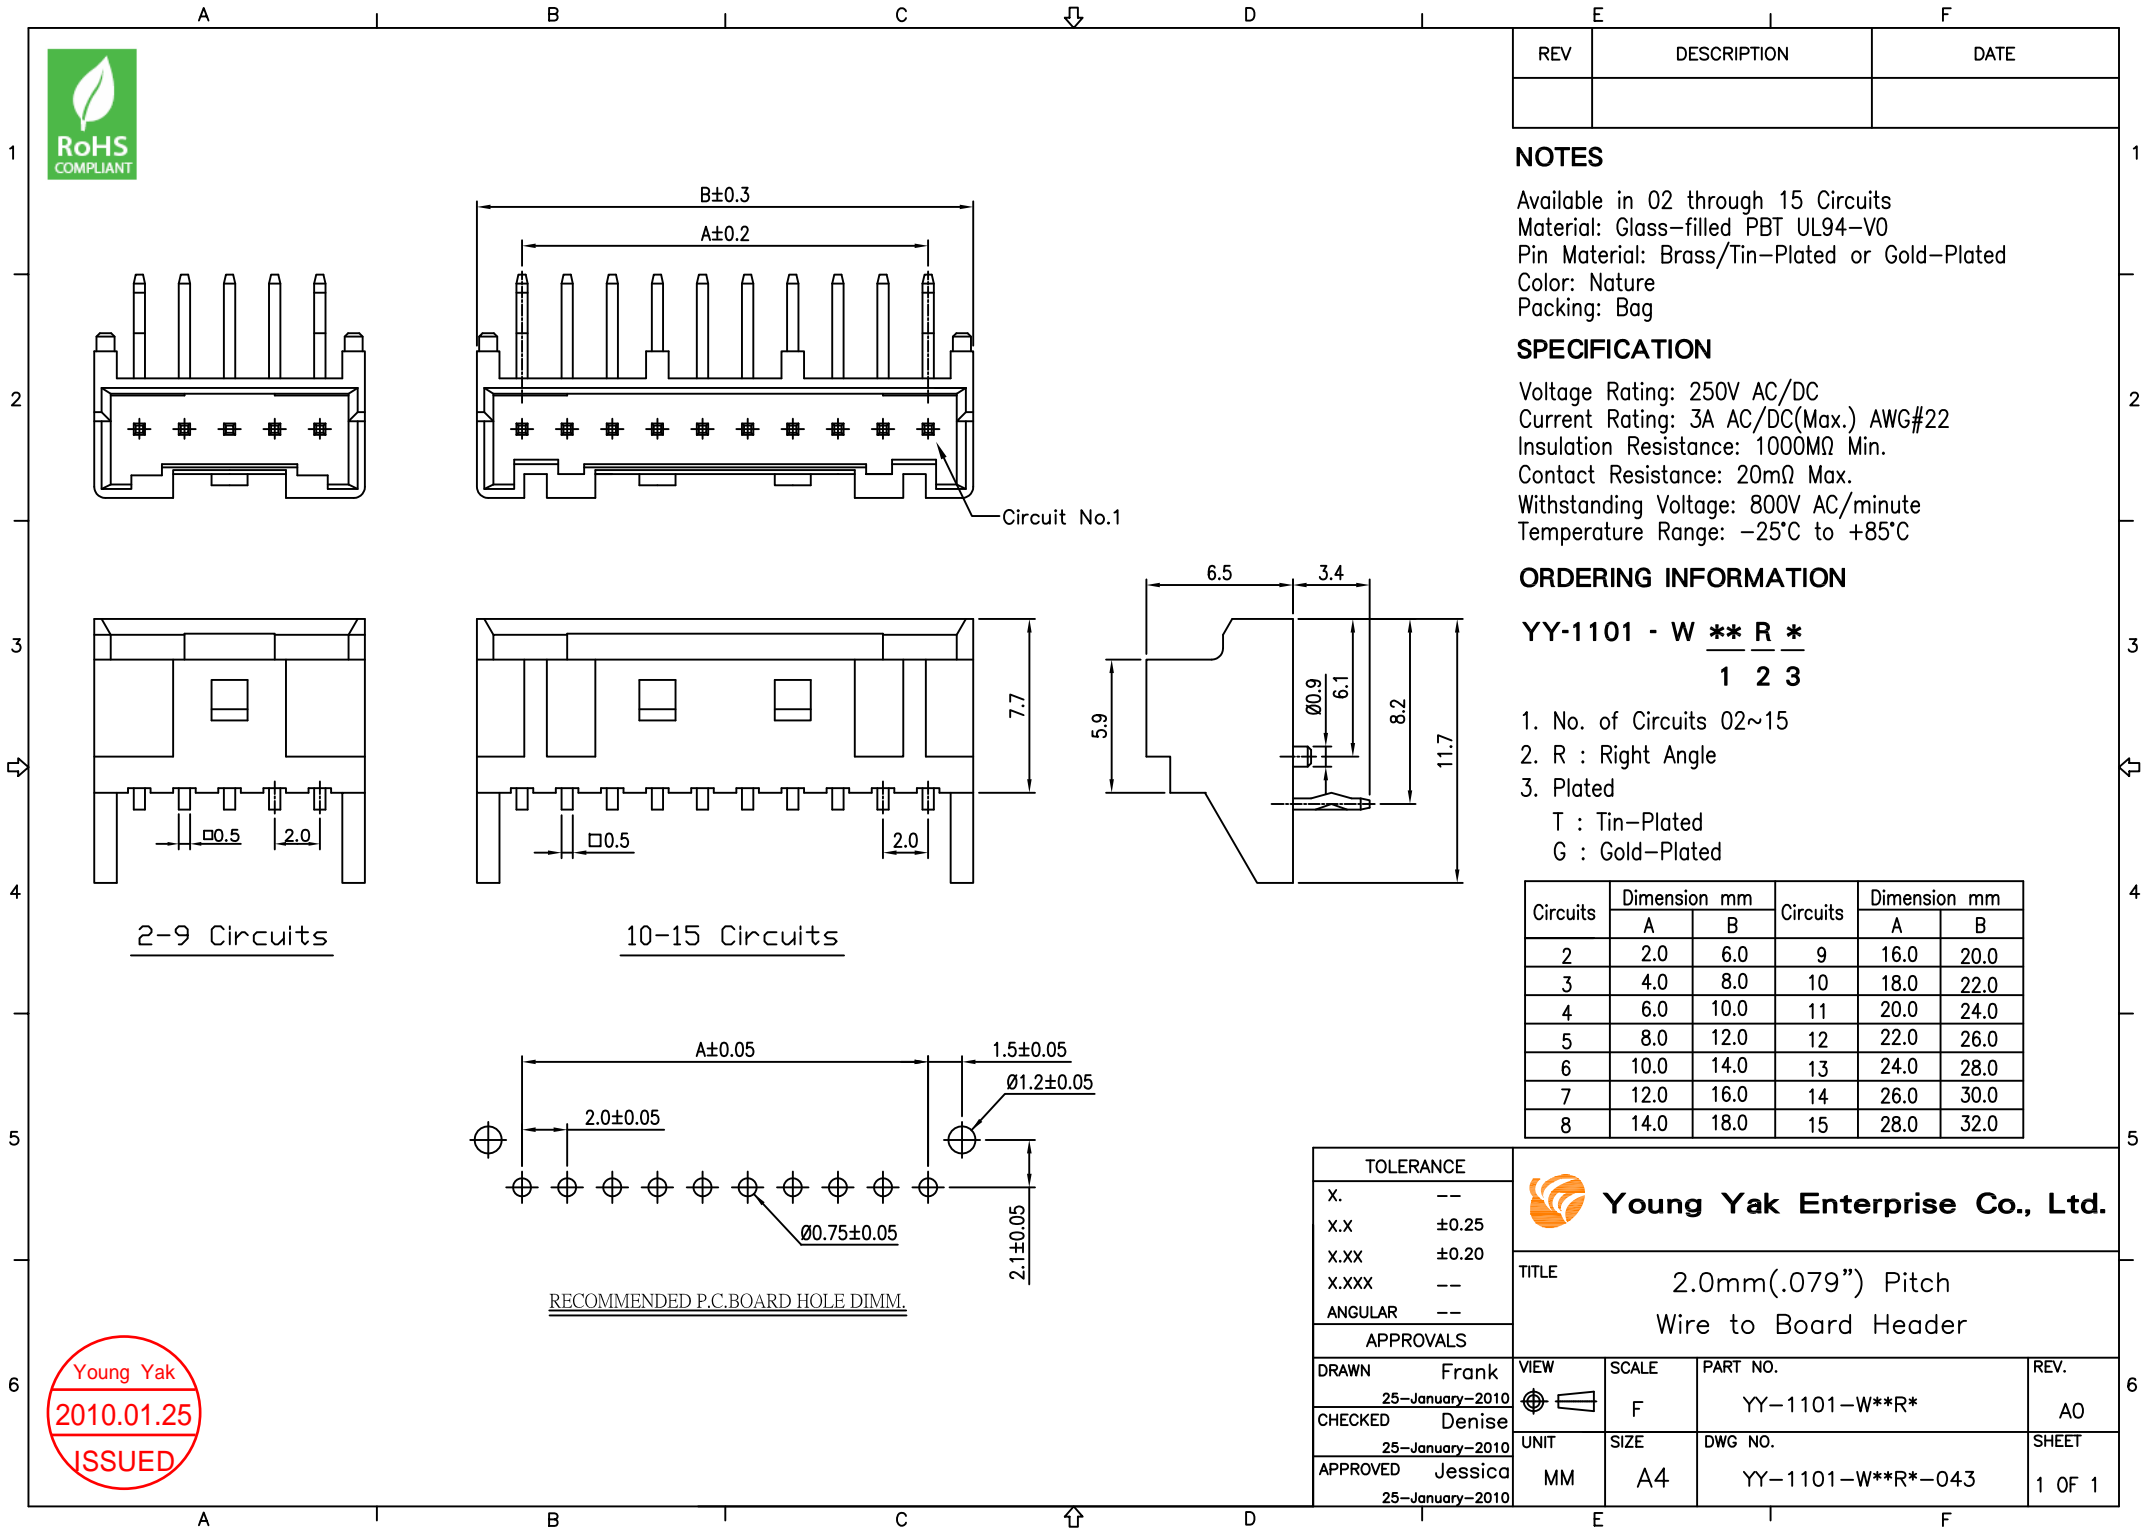

TOLERANCE				
X.	--	Young Yak Enterprise Co., Ltd. TITLE: 2.0mm(.079") Pitch Wire to Board Header		
X.X	± 0.25			
X.XX	± 0.20			
X.XXX	--			
ANGULAR	--			
APPROVALS		REV.		
DRAWN	Frank	VIEW	SCALE	PART NO.
	25-January-2010		F	YY-1101-W**R*
CHECKED	Denise	UNIT	SIZE	DWG NO.
	25-January-2010	MM	A4	YY-1101-W**R*-043
APPROVED	Jessica			REV.
	25-January-2010			A0
				SHEET
				1 OF 1